




[www.P1MFG.com](http://www.P1MFG.com)



scan for more information

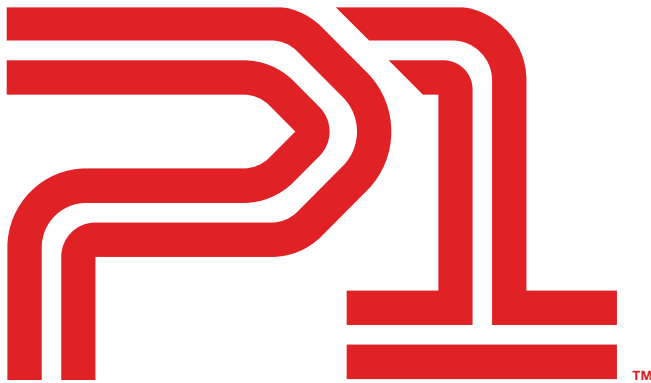

## INSTALLATION METHOD

**FOR HEAD STUD KITS**

Kit Number: **K002-H16E**

Application: **Chevrolet  
Small Block, Iron Block  
with 23° OEM & Many  
Aftermarket Heads**



**Point One, LLC**

**MAILING:** PO BOX 677  
ROGERSVILLE, MO 65742

**SHIPPING:** 11 WHITE OAK ROAD,  
ROGERSVILLE, MO 65742

[www.P1mfg.com](http://www.P1mfg.com)

417-753-5174

## Kit: K002-H16E Alloy: E190 Socket Required: 1/2"

### KIT CONTENTS

(16) SE4E Stud, 7/16-14 x 7/16-20 threads, 2.500" length, E190, black oxide finish

(4) SE5E Stud, 7/16-14 x 7/16-20 threads, 3.750" length, E190, black oxide finish

(14) SE6E Stud, 7/16-14 x 7/16-20 threads, 4.500" length, E190, black oxide finish

(34) NB4F 12pt Flange Nut, 7/16-20 threads, 1/2" wrenching, black oxide finish

(34) WB1T Flat Washer, 7/16 diameter, black oxide finish

LBO1 TORQUEPOINT Fastener Assembly Lube, 1oz packet

LBBR Lube application brush

### FASTENER INSTALLATION

**(NOTE: THIS PROCESS IS IDENTICAL TO WHAT WE DO DURING TORQUE-TENSION TESTING AT P1 HQ)**

1. Inspect kit contents for damage and confirm quantities.
2. Thoroughly clean all debris from engine block holes and threads.
3. Ensure all mating deck surfaces and fastener bearing surfaces are flat, free of debris and dry of any cleaning related products.
4. Inspect all deck gaskets for damage, fitment, & suitability.
5. Remove WASHERS from packaging and remove rust preventative coating from all faces of WASHERS, place on clean rag (petroleum-based solvent is recommended).
6. Remove remaining fasteners and place on clean shop rag, clean threads as required, **(do not unnecessarily remove rust preventative)**.
7. WITHOUT LUBE, washers, gaskets or heads, thread studs into their intended holes BY HAND ONLY until stud bottoms or thread run-out occurs (DO NOT USE TOOLS). Achieving smooth installation without tools is necessary. Remove fasteners and clean or repair threads if needed.
8. Remove fasteners from their holes and apply TORQUEPOINT assembly lube to entire length of block end threads of the fastener using included brush. Work lube into threads all the way around the threaded sections so lube is nearly flush with outer diameter of thread face.
9. Install studs into block by hand or using hex key with light force only.
10. Thoroughly clean any visible fastener lube from mating surfaces and fit gasket and head on block and install washers onto studs. The washers should be dry during installation. DO NOT USE LUBE ON THE WASHERS.
11. Apply TORQUEPOINT assembly lube to entire length of nut end threads of the fastener using included brush. Work lube into threads all the way around the threaded sections so lube is nearly flush with outer diameter of thread face. Lube should be evenly distributed and not excessive.
12. Apply TORQUEPOINT lube to each nut's bearing surface only. **Do not use lube on the washers.** Install nuts with washers, hand tight. The washer should not rotate during torque procedure.

### TORQUE RECOMMENDATIONS

Follow applicable OEM and/or aftermarket manufacturers suggested torque sequence & number of tightening steps.

Point One fasteners, paired with TORQUEPOINT fastener assembly lube, can sustain the following nominal torques and clamp loads while remaining below their minimum proof load rating.

**\*\*\*DO NOT EXCEED THESE TORQUE INPUT VALUES\*\*\***

**\*\*\*THESE VALUES WILL NOT BE APPLICABLE WHEN USING OTHER LUBRICANTS\*\*\***

SE4E, SE5E, SE6E Stud  
w/NB4F Nut 7/16-20  
threads

Torque: **80 ft-lbs**  
Typical Clamp Load: **12,500 lbs-force**

**Note:** The number of aftermarket replacement parts and OEM combinations of components is numerous. **Use caution as the clamp loads listed above may damage your assembly** – use lower installation torques such as those provided by the manufacturer of your components if applicable.